

G

DRAWING NUMBER
SDX2312

SIZE
A

SCALE:
NONE

DATE:
5-17-85

APPROVED BY:
TD

CHECKED BY:
TD

DRAWN BY:
PJ

DX2312, DX2312B

FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA


DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

FLOOR DRAINS

WITH 8 1/2" (215) ROUND ADJUSTABLE TOPS

WIDE FLANGE DECK DRAIN WITH ADJUSTABLE LIP DIMENSION

Load Rating: Medium Duty having a Safe Live (Static) Load between 2,000 lbs. (900 kg) and 4,999 lbs. (2,250 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

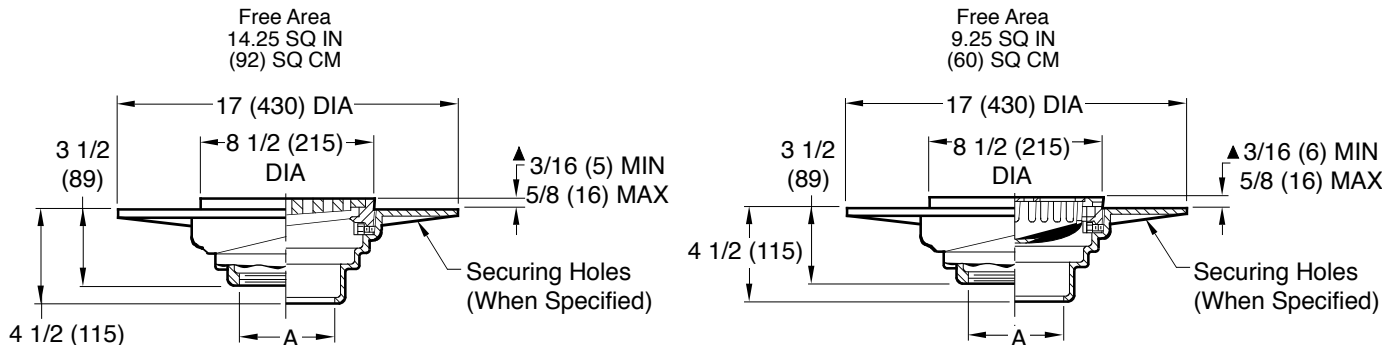

A (Pipe Size) = 02(50), 03(75) or 04(100)

LESS BUCKET

- Fig. DX2312C . . . CAULK OUTLET
- Fig. DX2312T . . . THREADED OUTLET

WITH "SAFE-SET" BUCKET

- Fig. DX2312CB . . . CAULK OUTLET
- Fig. DX2312TB . . . THREADED OUTLET

NOTE: If waterproof deck covering thickness is greater (or less) than the dimension shown, lip dimension must be specified. Roughing dimensions of the body must be adjusted accordingly. Drain body should be set low enough to permit "dimpling" of area surrounding drain.

▲ add 3/16" (5) when bronze top is specified.

REGULARLY FURNISHED:
 Duco Cast Iron Body, Adjustable Top, and Slotted ADA Grate.

- VARIATIONS:**
- NO-HUB Adaptor (Specify Fig. 2646Y)
 - Securing Holes -SH
 - Vandal Proof Grate -U
 - T Threaded Outlet
 - Quad Close Trap Seal (Specify Fig. 2692)

- OPTIONAL MATERIALS:**
- Galvanized Cast Iron -G
 - Nickel Bronze Top -NB
 - Polished Bronze Top -PB

NOTE: Dimensions shown in parentheses are in millimeters.

G	1-23-23	Added ADA	KK	JT	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER DX2312, DX2312B
F	8-10-20	Revised Bucket Options	MW	CL			
E	7-24-19	Added Load Rating	MW	JM			
D	6-19-19	Removed Function	MW	JM			
REV.	DATE	DESCRIPTION	BY	CKD. BY			