

Lavatory Faucet SLS-3522-1.5 **Installation Brief**

Model Numbers


SLS-3522-1.5 Lavatory faucet only, (5" height)

Modification Options

Append -suffix code to part numbers when applicable

-1.0 1.0 gpm (3.8 L/min) aerator

Tools & Materials



Meed Help?

Contact Symmons customer service at P: (800) 796-6667, (781) 848-2250 Email: gethelp@symmons.com


Monday - Friday 7:30 am - 6:00 pm EST


Please check Symmons website for technical help, the latest product information, warranty policy and a list of Symmons distributors

www.symmons.com



Dimensions Dia Lavatory Faucet, SLS-3522-1.5






Measurements		
Α	1-7/8", 48 mm	
В	1-3/16", 30 mm	
С	Hole Size	
	Min. Ø 1-1/4", 32 mm	
	Max. Ø 1-1/2", 38 mm	
D	4-1/16", 103 mm	
Е	Min. 2-1/2", 64 mm	
F	6-1/8", 155 mm	
G	5", 127 mm	
Н	3-5/16", 84 mm	
Ι	26°	
J	Deck Thickness Ref.	
	Min. 7/8", 22 mm	
	Max. 1-7/8", 47 mm	
K	25-7/8", 658 mm	
L	3/8" compression fitting	

Quick Install Guide Dia Lavatory Faucet, SLS-3522-1.5 SLS-3522-1.5 HOT←→ COLD Step 3 Hotter (+) Flush lines and check for leaks Colder (Limit stop adjustment Step 1 Step 2 Attach faucet assembly Connect supply hoses COLD **HOT** Pop-up Drain

Parts Assembly Dia Lavatory Faucet, SLS-3522-1.5

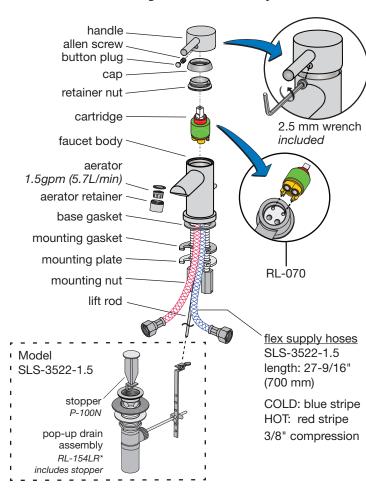

Replacement Parts			
Part Number	Item		
RL-070	Cartridge w/ Limit Stop		
RL-059-1.5* RL-059-1.0* RL-059-0.5*	Aerator kits 1.5 gpm (5.7 L/min) 1.0 gpm (3.8 L/min) 0.5 gpm (1.9 L/min) includes aerator, retainer & washer		
LN-15-1.5-NA* LN-15-1.0-NA* RL-019*	Non-aerated laminar flow outlet kits 1.5 gpm (5.7 L/min) 1.0 gpm (3.8 L/min) 0.5 gpm (1.9 L/min) includes aerator, retainer & washer		
RL-066*	Handle kit includes handle, allen screw & RB button plug requires 2.5 mm Allen wrench		
RL-067*	Mounting hardware kit threaded studs (2) hex nut (2) rubber washer (1) metal washer (1)		
LN-01660*	4" deck plate		

^{*}Note: For decorative finish faucets append the appropriate suffix code letters to part numbers marked with an asterisk (*)